


- Note:
- Vista must be set using the timer (03/23185/0) MODE button to MAN ON for end of line testing and remain in that mode delivered to end customer.
  - Timer plastic battery insulation tab must be pulled out and left off following end of line inspection.
  - Timer screen protector needs to be removed.
  - SD Card (100001538) must be left inserted into media board.
  - EU kettle lead and plug must be fixed to the product and the UK kettle lead plug is part of the accessory kit.
  - Timer decorative cover to be included as part of the accessory kit.
  - No Low voltage wires should be wire tied to high voltage wires.
  - Mirrored glass top fixing bracket (300004521) needs to be fitted using a jig or the mirrored glass to ensure the gap is correct to allow the installation of the mirrored glass (100001448) by the end customer.

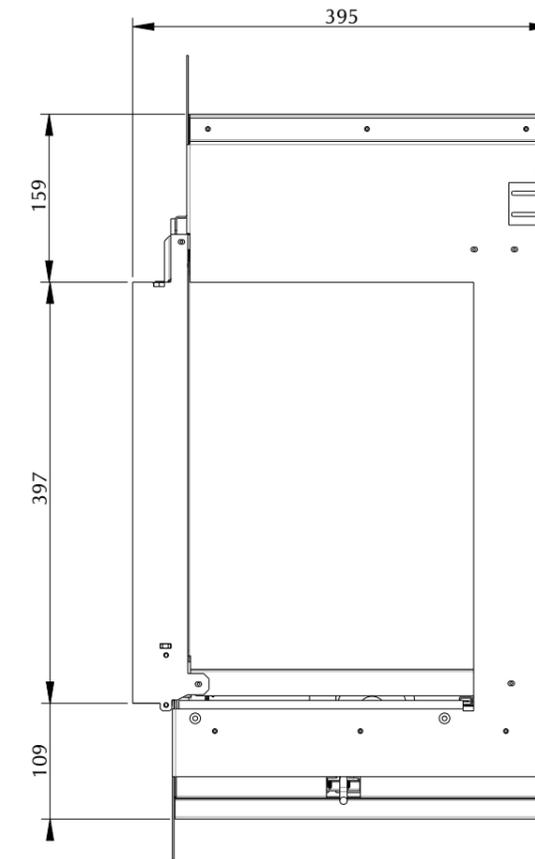

ISSUE	MODIFICATIONS	OCN	APPD	DATE	NOTES
1	Released for Production.	---	D.Kiely	17/10/24	

<b>GLEN DIMPLEX</b> RESEARCH & DEVELOPMENT HEATING AND VENTILATION IRELAND Barn road, Dunleer, Co.Louth, Ireland. Tel: +353(0)41 6872000					THIS DRAWING IS SUPPLIED IN CONFIDENCE AND THE COPYRIGHT THEREOF IS THE PROPERTY OF GLEN DIMPLEX: IT MUST NOT BE USED BY A THIRD PARTY WITHOUT PRIOR PERMISSION. © 2024	
DRAWN BY	DATE	SCALE	HOLE TOL	GEN TOL	PROJECT	
D.Kiely	17/10/2024	0.150	+/-0.05	0 +/-0,4	Vista 70-I	
APP'D BY	DATE	DIM IN	ANGLES	0,0 +/-0,2	TITLE	
N/A	N/A	mm	+/-0.5°	0,00 +/-0,1	Vista 70-I Assembly	
MATERIAL			R.o.H.S. and POP compliant		DRG NO	
See individual parts			All materials must comply with the requirements of European Directive 2015/863/EU (RoHS) and Regulation No. 2019/1021 (POP) on the restriction of the use of certain hazardous substances		300004312	
FINISH			See Individual parts		NO. OFF: 1	
DO NOT SCALE		THIRD ANGLE PROJECTION		A3		
IF IN DOUBT ASK				Sht 1 of 1		